

Audio has never been so easy.

- Ultra Thin Design - 1" Thick
- Optical Input
- Sub and Line Out
- IR Programmable



Designed and Built in the USA

Ultra Thin Design

With displays getting thinner and thinner and installs demanding a cleaner look, the DMA-355H digital mixer/amplifier is the perfect choice. With the available mount, the DMA-355H can invisibly and easily fit behind any flat screen display. At one inch thick, it is the thinnest home theater amplifier on the market.

Digital Optical Input

Due to cost, more and more televisions are eliminating all audio outputs except for the optical. The DMA-355H is the only mini amplifier that incorporates an optical input that is digitally mixed with the other analog inputs. No matter what input you choose, it is always on and available.

Sub and Line Out


The DMA-355H features a sub and line out. The sub out follows the master volume. The post-mix line out can be daisy chained to other amplifiers for additional zones and is always at full volume.

IR Programmable

For a truly seamless install, the DMA-355H is IR programmable to any device on the market. It comes with a sub-miniature, dual-band IR pickup module that can be discretely placed on the display's bezel.



Front Panel

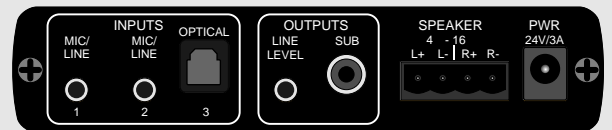

Rear Panel

Specifications:

Power:	55watts RMS @ 4/8 Ohms
Freq. Response:	20Hz to 22kHz
Input 1:	Stereo 3.5mm - mixable
Input 2:	Stereo 3.5mm - mixable
Input 3:	Digital Optical - mixable
IR in:	3.5mm - power on tip 3.3V
Speaker Out:	4 - 16 Ohms
Sub Out:	RCA - follows master volume
Line Out:	Post mix - all channels
Power Supply:	24V @ 2.5 Amps - 60Watts
Operating Temp:	-40F to +190F
Weight:	.75 lbs (amp only)
Amp Dimensions:	4.8"w x 4.0"d x 1.0"h
Warranty:	3 year standard